

TABLE "A"	
DECK JOIST SPAN	S

(DOUGLAS FIR #2 OR BETTER)

SIZE	SPACING	SPAN
2 x 6	12" o.c. 16" o.c. 24" o.c.	10'-6" 9'-0" 7'-6"
2 x 8	12" o.c. 16" o.c. 24" o.c.	14' - 0" 12' - 0" 9' - 6"
2 x 10	16" o.c. 24" o.c.	15'-0" 12'-0"
2 x 12	24" o.c.	14'-0"
4 x 6	12" o.c. 16" o.c. 24" o.c.	14'-6" 13'-6" 11'-6"
4 x 8	24" o.c.	15'-O"
4 x 10	32" o.c.	15'-0"

#### TABLE "B" **HEADER SIZING & SPANS**

(DOUGLAS FIR #2 OR BETTER)

JOIST	HEADER		
SPAN	SIZE	SPAN	
UPTO 8'-0''	4 X 8	8'-0''	
	4 X 10	10'-0''	
	4 X 12	11'-6''	
	6 X 12	14'-0''	
8'-1" - 10'-0"	4 X 8	7'-6''	
	4 X 10	9'-6''	
	4 X 12	11'-0''	
	6 X 12	13'-0''	
10'-1'' - 12'-0''	4 X 8	7'-0''	
	4 X 10	9'-0''	
	4 X 12	10'-0''	
	6 X 12	12'-0''	
12'-1" - 15'-0"	4 X 8	6'-6''	
	4 X 10	8'-0''	
	4 X 12	9'-6''	
l	6 X 12	11'-0''	

### TABLE "C" △ LEDGER BOLT SPACING

(3/8 DIA. X 6" LAG BOLTS — SEE NOTE 1)

DECK JOIST SPAN	SPACING
8'-0" OR LESS	8" O.C.
8'-1'' TO 10'-0''	6" O.C.
10'-1" TO 12'-0"	5-1/2" O.C.
12'-1" TO 14'-0"	4-1/2" O.C.
14'-1" TO 15'-0"	4'' O.C.

#### NOTES:

- 1. LEDGER BOLTS SHALL BE 3/8" DIA. X 6" LONG WITH 1/4" DIA. PRE DRILLED HOLES. BOLTS ARE TO BE PLACED STAGGERED.
  2. ALL METAL HARDWARE & SCREWS TO BE GALVANIZED OR OF OTHERWISE APPROVED CORROSION RESISTANCE
  3. MAXIMUM 5' JOIST SPAN IF 2ND FLOOR IS CANTILEVERED AT LEDGER.
  4. SHEAR WALLS MAY NOT BE MODIFIED UNLESS STRUCTURAL CALCULATIONS ARE SUBMITTED AND APPROVED BY THE BUILDING DEPARTMENT
  5. USE OF THIS STANDARD IS LIMITED TO R-3 OCCUPANCIES (SINGLE FAMILY DWELLINGS AND DUPLEX)

#### **DISCLAIMER:**

ALTERNATE DECK **DESIGNS** MAY BE POSSIBLE WHEN PROVIDED WITH ΑN ENGINEERED ANALYSIS. USE OF THIS CONVENTIONAL STANDARD DESIGN IS AT THE USER'S RISK AND CARRIES NO IMPLIED OR INFERRED GUARANTEE AGAINST FAILURE OR DEFECTS.


	WESTERN RIVERSIDE COUNTY CODE UNIFORMITY PROGRAM					
-74	CITY OF MURRIETA					
	- And	BUILDING DEPARTMENT				
	Murrieta  Ma great place to grow	BALCON	Y/DECK ST	ANDARD		
	TEL951.304.CITY	1 Town Square Murrieta, CA 92562				
	FAX 951.461.6097	8/27/2009	DECKSTDS2009	Page 1 OF 4		

### KNEE BRACE DETAIL (A) 0 0 0 1/2" DIA BOLTS W/ NUTS AND WASHERS 3" TYPICAL ALL BRACED CONNECTIONS 4x4 BRACE TYPICAL TYPICAL 4x4 POST (MIN.) **END POSTS INTERIOR POSTS** MAX **NOTCH DETAIL** (TYPICAL) NOTE:

# LEDGER DETAIL (B)


 END POSTS REQUIRE SINGLE KNEE BRACE. ALL INTERIOR POSTS TO HAVE

DOUBLE BRACES.

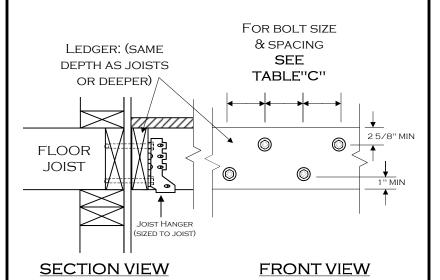

NOTE: THIS DECK CONNECTION DETAIL IS BASED ON THE ASSUMPTION THAT A MINIMUM 1-1/2" THICK WOOD MEMBER IS ADEQUATELY INSTALLED AT ALL EDGES OF THE 2ND FLOOR DIAPHRAGM. IF ANY OTHER MATERIAL IS USED, SUCH AS TJI JOISTS, A SPECIAL ENGINEERED DESIGN WILL BE REQUIRED. IT IS THE OWNER'S RESPONSIBILITY TO VERIFY THE PRESENCE OF THE APPROPRIATE RIM JOIST.

## FOOTING DETAIL (C)

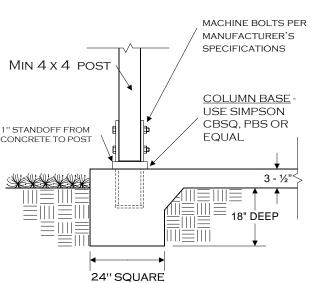

# WESTERN RIVERSIDE COUNTY CODE UNIFORMITY PROGRAM CITY OF MURRIETA

Aurrieta BALCONVIDEOU CTANDAI

Ca great place to grow BALCONY/DECK STANDARD


TEL951.304.CITY


1 TOWN SQUARE
MURRIETA, CA 92562

FAX951.461.6097

8/27/2009 \( \)
DECKSTDS2009

PAGE 2 OF 4

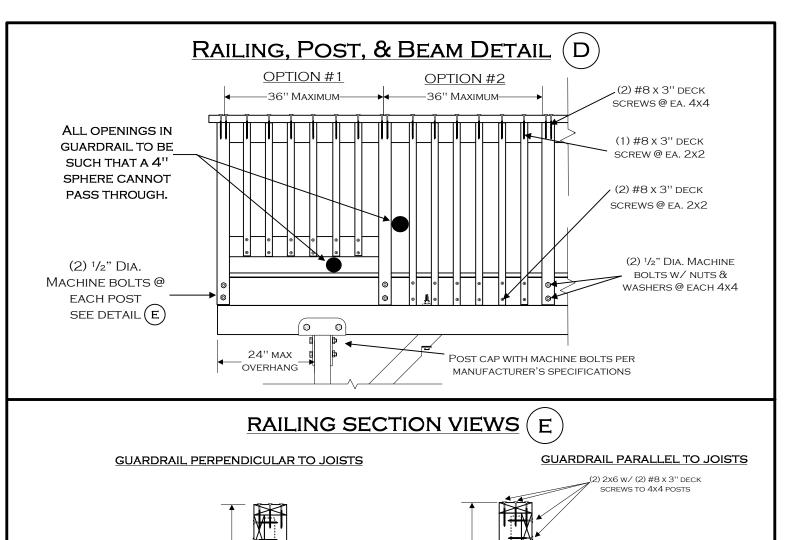

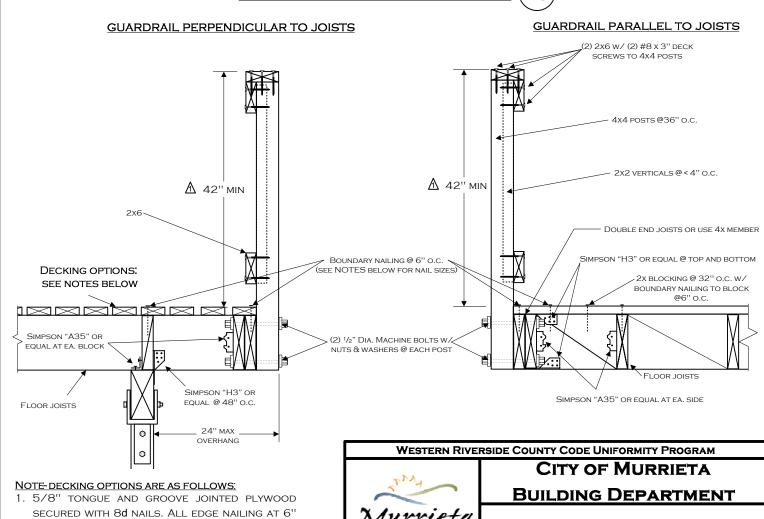

TEL 951.304.CITY

FAX 951.461.6097

O.C. MUST BE COVERED WITH AN APPROVED WEATHER RESISTIVE MATERIAL WALKING SURFACE,

2. 2x6" DECKING SECURED W/ (2) 16d NAILS @ EA.

AND SLOPED FOR DRAINAGE.

JOIST.

**BALCONY/DECK STANDARD** 

1 Town Square

DECKSTDS2009

PAGE 3 OF 4

8/27/2009

